AVA 2STYL



Strong, secure HDC clic planks feature IXPE acoustical backing for sound reduction, shock absorption and comfort underfoot.

AVA

variety of markets.

along with new patterns and colors in two different constructions for standard glue down and high density

core (HDC, 4.2mm/8 mil) clic.

avaflor.com

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT for a

Declare.









© 2024 Novalis® Innovative Flooring

AVA_®2STYL



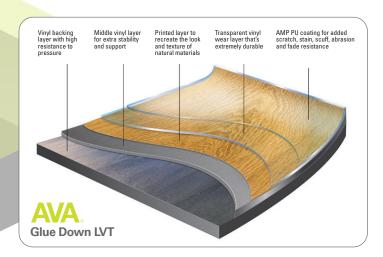

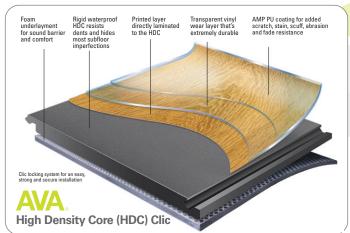

Glue Down Specifications

- Wear Layer: 8 mil (0.2 mm) • Overall Thickness: 2.0 mm
- Size: 6" x 48"
- 100% Phthalate Free
- Reach Compliant
- Warranty: 10-Year Residential and 3-Year Light Commercial



- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength

HDC Specifications

- Wear Layer: 8 mil (0.2 mm)
- Overall Thickness: 4.2 mm
- Size: 5.75" x 47.75"
- 100% Phthalate Free
- Reach Compliant
- Warranty: 12-Year Residential



- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength



Baltic Oak Suede

Glue Down; BO2003 / HDC; BO2003D



Baltic Oak Taupe

Glue Down: BO2002 / HDC: BO2002D



Baltic Oak Hazel

Glue Down: BO2006 / HDC: BO2006D





Glue Down: BO2005 / HDC: BO2005D



Glue Down: CW2002 / HDC: CW2002D



Glue Down: CW2001 / HDC: CW2001D



Glue Down: SA2003 / HDC: SA2003D



Glue Down: SA2002 / HDC: SA2002D



European Walnut Chocolate Glue Down: EW2001 / HDC: EW2001D

Talk to your AVA® representative to get our 2STYL™ architectural folder and see which products would be best for your next project.

