

WITH 16 FRESH COLOR-WAYS IN A FLOWING GRAIN PATTERN, THE **AVA SNSE** COLLECTION IS OFFERED IN 8 SATURATED COLORS WITH 8 COMPLEMENTARY NEUTRALS.



- WEAR LAYER: 20 MIL
- THICKNESS: 2.5 MM
- SIZE: 12" X 24"
- 100% PHTHALATE FREE
- REACH COMPLIANT
- WARRANTY: 10 YEAR COMMERCIAL WARRANTY



NOVALIS®
INNOVATIVE FLOORING

OTHER PRODUCTS IN THE AVA COLLECTION: **AVA DSGN™** & **AVA STYL™**

WITH WORLDWIDE SALES OFFICES AND DISTRIBUTION PARTNERS, NOVALIS IS A LEADER IN THE DESIGN AND MANUFACTURING OF INNOVATIVE AND SUSTAINABLE LUXURY VINYL FLOORING. ESTABLISHED IN 1984, NOVALIS HAS DEVELOPED A DIVERSE RANGE OF DESIGNS AND PRODUCTS THAT HAVE WON NUMEROUS AWARDS AND ARE RECOGNIZED BY THE INDUSTRY AS SETTING THE BENCHMARK IN LVT.

AVA™, STYL™, DSGN™, AND SNSE™ ARE TRADEMARKS OF NOVALIS INNOVATIVE FLOORING.
© 2015 NOVALIS INNOVATIVE FLOORING

AVA SNSE • AVAFLOOR.COM • 877.861.5292 • SALES@AVAFLOOR.COM



NOVALIS®
INNOVATIVE FLOORING



SNSE™

AVA™

AVA SNSE




ALL AVA SNSE COLORS ARE READILY AVAILABLE THROUGH OUR USA QUICK-SHIP PROGRAM.

THE PERFECT LONG-TERM FLOORING SOLUTION FOR HEAVY TRAFFIC AREAS INCLUDING AREAS WITH HEAVY ROLLING LOADS, AVA SNSE IS SUITABLE FOR VIRTUALLY ALL COMMERCIAL SECTORS WITH AN EMPHASIS ON EDUCATION AND HEALTHCARE.

SPECIFICATIONS:	
ASTM F1700-13 SOLID VINYL FLOOR TILE:	CLASS III, TYPE B
ASTM D2047 STATIC COF FOR POLISHED SURFACES:	EXCEEDS INDUSTRY STANDARDS
ASTM F970-07 STATIC LOAD LIMIT:	PASSES (MODIFIED EXCEEDS 1000 LBS PSI)
ASTM E648 CRITICAL RADIANT FLUX:	CLASS 1
ASTM E662 SMOKE DENSITY:	PASSES
ASTM F925 STAIN & CHEMICAL RESISTANCE:	EXCELLENT



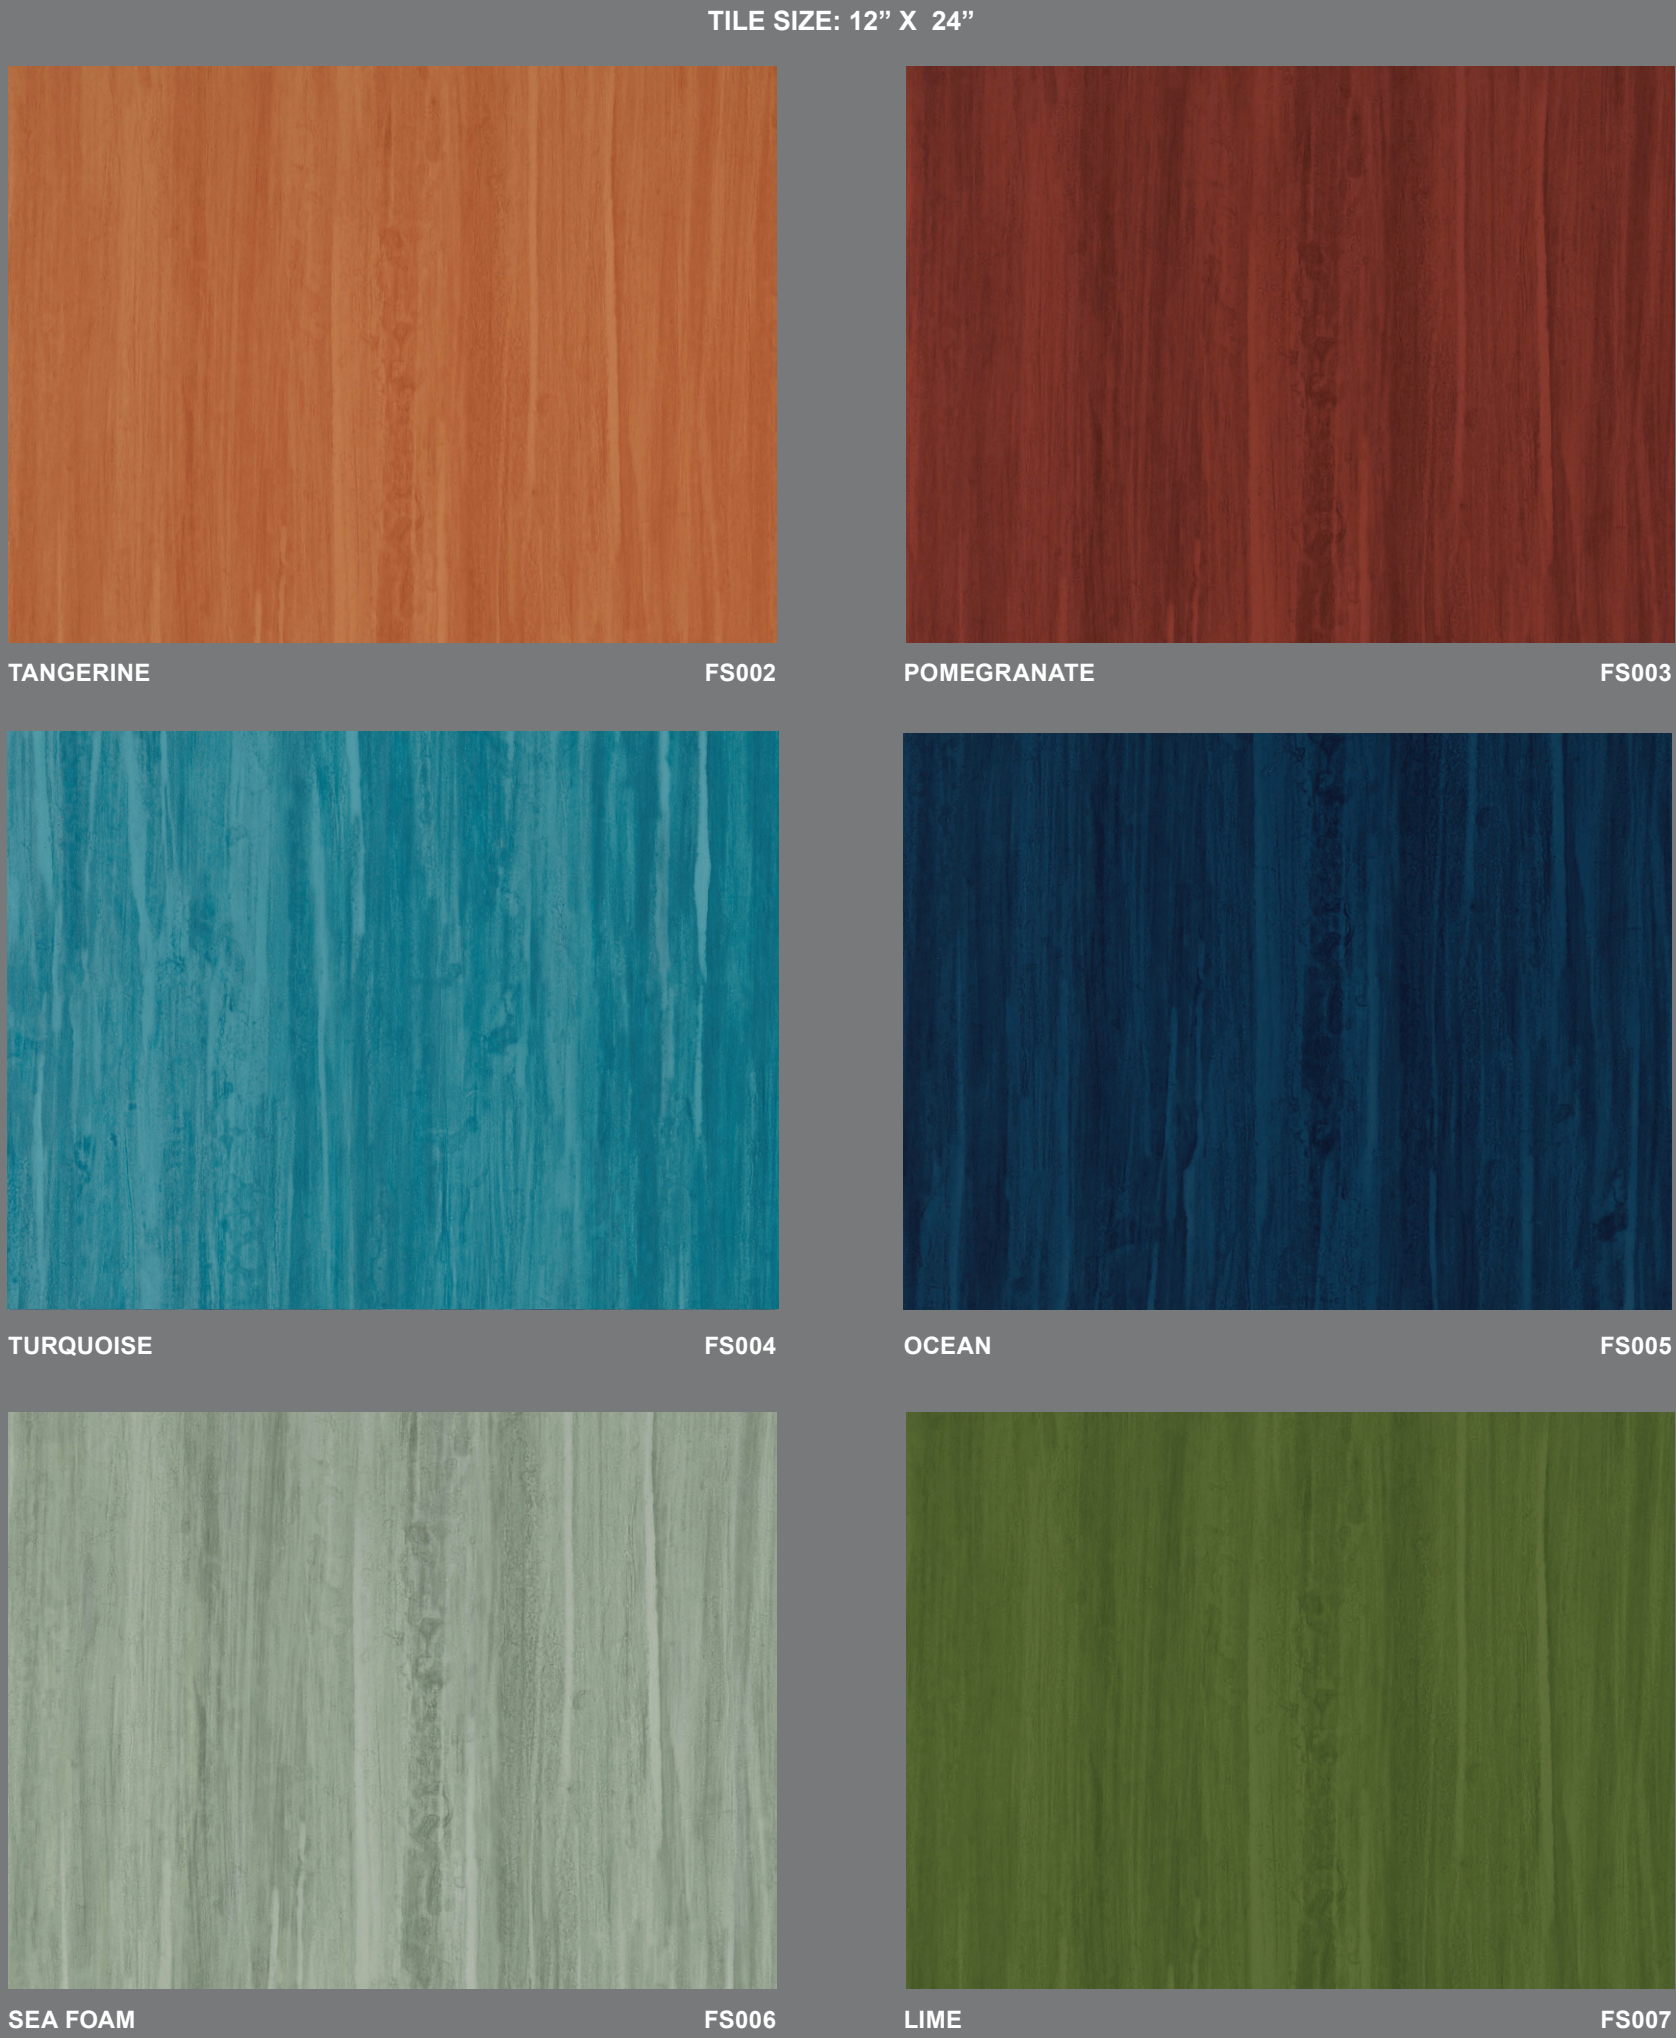

AVA
S
NSE

GLUE DOWN



COLOR REPRODUCTION MAY VARY WITH YOUR COMPUTER OR MOBILE DEVICE. FOR ACCURATE COLOR, PLEASE REFER TO ACTUAL PRODUCT SAMPLES IN OUR AVA ARCHITECT FOLDERS OR REQUEST SAMPLES FROM US.