
AVAINRGE





Distressed Concrete, Erie / Superior



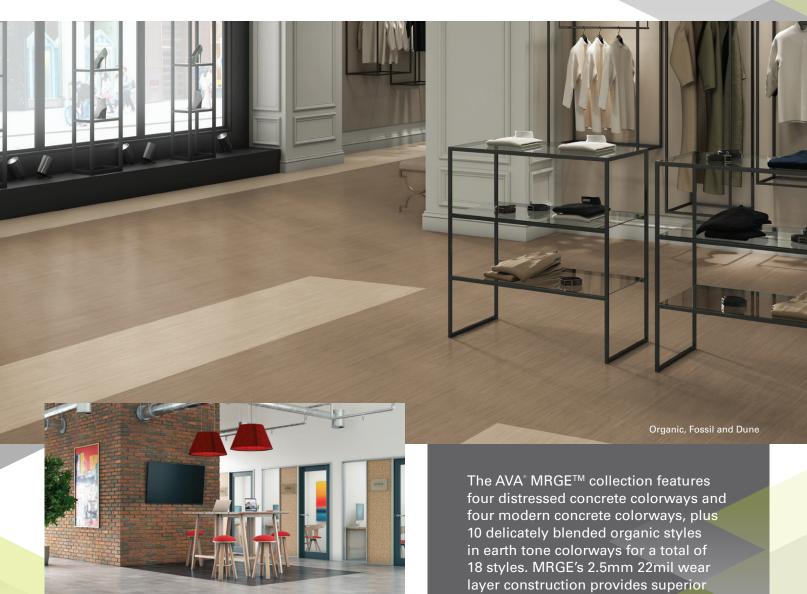











performance in the toughest commercial settings including Hospitality, Corporate and Retail.

avaflor.com

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. AVA® has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT for a variety of markets.

© 2024 Novalis® Innovative Flooring

AVA MRGE


avaflor.com • 877.861.5292 sales@avaflor.com

Specifications

- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 2.5 mm
- Size, Organics / Distressed Concrete: 9.84" x 39.37" (250 mm x 1000 mm)
- Size, Béton: 39.37" x 39.37" (1000 mm x 1000 mm)
- Straight Edge
- 100% Phthalate Free
- Reach Compliant
- Warranty: 20-Year Commercial



- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength

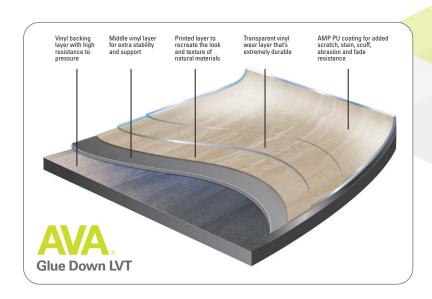

Organic (9.84" x 39.37" / 250 mm x 1000 mm)




Distressed Concrete (9.84" x 39.37" / 250 mm x 1000 mm)





DI004

Ontario



Béton (39.37" x 39.37" / 1000 mm x 1000 mm)





Talk to your AVA® representative to get our MRGE™ architectural folder and see which products would be best for your next project.